

REC BITUMEN IMPREGNATED BOARDS

EXPANSION JOINT FILLER

PRODUCT DESCRIPTION

REC BITUMEN IMPREGNATED BOARDS are preformed expansion joint filler boards designed for use in joints in concrete and brick structures. The boards are manufactured from high-grade, slow-growing wood fibers that are bitumen-impregnated and compounded into a compressible, non-extruding board.

USES

- Joint filler boards for concrete highways, paving, curbs, gutters, and floors.


ADVANTAGES

- Withstand repeated cycles of expansion and compression without extruding.
- Recover to a minimum of 75% of their original thickness after compression.
- Virtually unaffected by temperature changes.
- Low moisture absorption.
- Durable and easy to handle.

PACKAGING AND THICKNESS

Property	Specification
Board Size	2.1 × 1.2 m
Thickness	10 mm
	12 mm
	19 mm
	25 mm

JOINT DESIGN

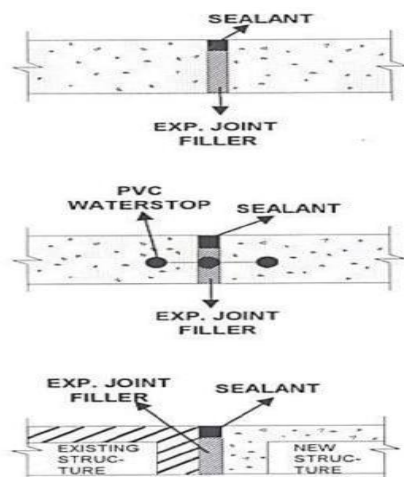

APPLICATION INSTRUCTIONS

SUBSTRATE PREPARATION

The boards should be stored on a flat, sound surface. The boards can be cut to size on site using a sharp knife or a conventional hand saw or circular saw.

APPLICATION

The **Expansion Joint Filler** is installed against existing concrete at columns and against adjacent structures or flatwork before the placement of subsequent concrete. For floors, paving, and runways, the filler should be installed 1 cm below the elevation of the concrete surface where the joint is to be subsequently filled to the surface elevation with a suitable sealant.

SHELF LIFE & STORAGE

Shelf life is one year from the date of manufacture when stored in tightly closed original containers. Store in a cool, dry and well-ventilated area, protected from extreme temperatures, direct sunlight, and sources of heat. Keep containers tightly sealed when not in use.

SAFETY PRECAUTIONS

Avoid contact with skin and eyes and do not inhale vapors or spray mist. Wear suitable gloves, eye protection, and protective clothing during mixing and application. Use in a well-ventilated area.

QUALITY STATEMENT

All our products are manufactured to comply with our internal quality management system to ensure consistency and quality.

DISCLAIMER

While the company guarantees its products against defective materials, the use and application of these products are made without guarantee since the conditions of their application are beyond its control. It is recommended to verify with the company that the product is suitable for the intended use. This Data Sheet version is the latest one. The company may modify it without any prior notice. Technical characteristics are listed for guidance only. For more information, please contact the head office of RECKON CHEMICALS PVT LTD. located in Lahore.

NOTE

The information included on this Technical Data Sheet is the sole property of Reckon Chemicals Pvt Ltd, Lahore. The unauthorized disclosure, use, dissemination or copying (either whole or partial) of this data sheet or any information it contains, is prohibited and subject to legal pursuit.

WARRANTY: The Reckon Chemicals (Pvt.) Ltd. (Reckon) solely and expressly warrants that its products shall be free from defects in materials and workmanship for one (1) year from the date of purchase. Unless authorized in writing by an officer of Reckon, no other representations or statements made by Reckon or its representatives, in writing or orally, shall alter this warranty. Reckon MAKES NO WARRANTIES, IMPLIED OR OTHERWISE, AS TO THE MERCHANTABILITY OR FITNESS FOR ORDINARY OR PARTICULAR PURPOSES OF ITS PRODUCTS AND EXCLUDES THE SAME. If any Reckon product fails to conform with this warranty, Reckon will replace the product to Buyer. Replacement of any product shall be the sole and exclusive remedy available and buyer shall have no claim for incidental or consequential damages. Any warranty claim must be made within one (1) year from the date of the claimed breach. Reckon does not authorize anyone on its behalf to make any written or oral statements which in any way alter Reckon's installation information or instructions in its product literature or on its packaging labels. Any installation of Reckon products which fails to conform with such installation information or instructions shall void this warranty. Product demonstrations, if any, are done for illustrative purposes only and do not constitute a warranty or warranty alteration of any kind. Buyer shall be solely responsible for determining the suitability of Reckon's products for the Buyer's intended purposes.

RECKON CHEMICALS PRIVATE LIMITED
21 CCA, BLOCK B, KHAYABAN-E-AMIN, LAHORE
Toll: +92-42-35452620, +92-42-35230419
Web: www.reckonchemicals.com
Email: Info@reckonchemicals.com

